

B618B





"A" Dimension: 5/8"

"A" Dimension: 7/8"

"A" Dimension: 1-1/8"

B618B - 18mm Camlock *This model also available with hardened Steel Housing (S618A) B622F - 22mm Camlock

B629F - 29mm Camlock

B639F - 40mm Camlock

B636F - 36mm Momentary Switch Lock






"A" Dimension: 1-1/2"

"A" Dimension: 1-1/2"

Above Camlocks shown are available in both Left & Right Hand Turn and 90° or 180° Turn.

Also available:

- · Finger Style Lock Washers
- Nylon Nut (Elminates need for Lock Washer)





to help prevent drilling













S619A/B* High Security T-Handle Lock. Solid Hardened Steel Housing with 1/4" (6mm) thick rounded face to help prevent against drilling.

This lock meets N.A.M.A. Specifications.

S619D/F* High Security T-Handle Lock. Solid Steel Housing with 1/8" (3mm) thick face to help prevent against drilling.

This lock meets N.A.M.A. Specifications.


B & F = Spring Action Latch,A & D = Deadbolt Action Latch (Please Specify)

S833H Hardened Steel Housing for "Removable Core" Plug Lock.

\$6195 (Short Body) High Security "Removable Core" Plug Lock. This lock meets N.A.M.A. Specifications.

B620F High Security Push Lock



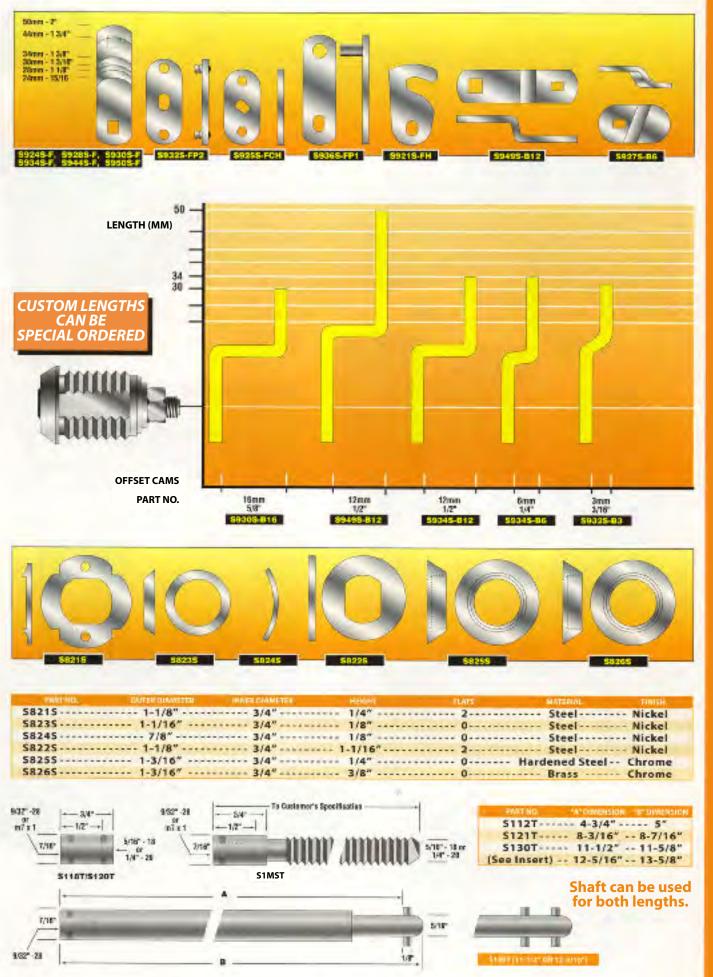

Lock America measures primarily in millimeters (1* = 25.4mm) • All locks shown at approximate actual size